

Sight Flow Indicators

Sight Flow Indicator Type S With Spinner/Paddle Wheel

VP5.01

- **High Visibility Spinner**
- **CE Marked and fully compliant with the Pressure Equipment Directive**
- **Threaded or flanged connections**
- **Pressures up to 60 Bar**
- **Temperatures up to 250°C**



Applications:

The style S sight flow indicator is used to check the flow of a liquid in a pipeline. It can be used in vertical or horizontal lines and is ideal for flow monitoring in full pipes.

Advantages

- **Fully PED Compliant**
- **Ease of Maintenance:**
Glasses can be individually removed & replaced
- **Durable construction**
- **METAGLAS® Safety sightglass option**

Construction:

- Screwed connections to NPT, BSP parallel or taper
- Socket weld also available
- Standard Flanges include ANSI 150, ANSI 300 and PN16 Special flanges available
- Body cast in 316 stainless steel or carbon steel
- Stainless steel covers and screws
- PTFE gaskets
- Sodalime glass to BS3463 for rated to 16 Bar
- Borosilicate glass recommended for steam & condensate

Options:

- **METAGLAS® Safety Sightglass Windows**
For ultimate safety & long life
- **Special Materials:** Including Super Duplex or Low Carbon Steels.
- **NACE MRO175:** Sightglasses can be produced to conform with NACE MR0175
- **Lining:** Body can be lined with HALAR, ECTFE or PFA for particularly corrosive applications
- **High pressure** soda lime glass to BS3463 rated to 60 bar
- **High pressure** range uses powder coated mild steel covers as standard, stainless steel covers available as an option
- **Toughened Borosilicate** to BS3463 or DIN7080 rated to 16 Bar
- **Mica discs** can be used to protect glass from alkaline liquids or steam

Quality:

- Manufactured to the highest standard
- Quality system is independently audited by BSI and certified to ISO9000
- Indicators are fully PED compliant & CE marked where required
- Full material traceability is maintained, material Test certificates & pressure test certificates supplied on request


Specification Code

Code		Description		
SS			Body Stainless steel body BS 1504 316 C16	
CS			Carbon steel body BS 1504 161 GR480	
	H		Glass Material & Pressure Range Toughened soda lime glass to BS3463 rated to 16 bar (Standard) Toughened soda lime glass to BS3463 rated to 40 bar Toughened borosilicate glass to BS3463 Toughened borosilicate glass to DIN 7080	
	B			
	HB			
		015	Indicator Size 15mm / 1/2"	Minimum Flow Rate - Lit / Min 3.5
		020	20mm / 3/4"	4.2
		025	25mm / 1"	7.0
		040	40mm / 1 1/2"	17.0
		050	50mm / 2"	25.0
		080	80mm / 3"	60.0
		100	100mm / 4"	100.0
		150	150mm / 6"	250.0
		200	200mm / 8"	500.0
		A	End Connection	
		C	ANSI 150	
		N	ANSI 300	
		1	PN16	
		2	BSP	
		3	BSPT	
		4	NPT	
			Socket Weld	

Materials of construction

Covers (Standard)	-	Stainless steel BS 1504 304 C15
(High Pressure)	-	Powder coated mild steel (machined stainless steel an option)
Internal Gasket	-	PTFE
External Gasket	-	Klingsil C4400
Edge Protector	-	Klingsil C4400
Fastners (Standard)	-	A2 Stainless Steel
(High Pressure)	-	High tensile steel

Dimensions

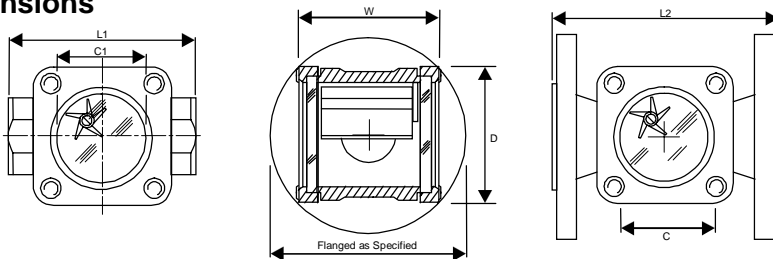

NOMINAL BORE	LENGTH L1	LENGTH L2	WIDTH W	DEPTH D	CLEARVIEW C
15/20mm	85	130	63	60	42
25mm	95	140	72	66	48
40mm	120	180	102	84	62
50mm	150	220	118	106	77
80mm	N/A	260	160	170	100
100mm	N/A	260	196	170	100
150mm	N/A	360	304	220	150
200mm	N/A	460	370	280	200